




龙艺**PLUS/PRO/MATE**系列租赁屏

目录

C O N T E N T S


01

PLUS

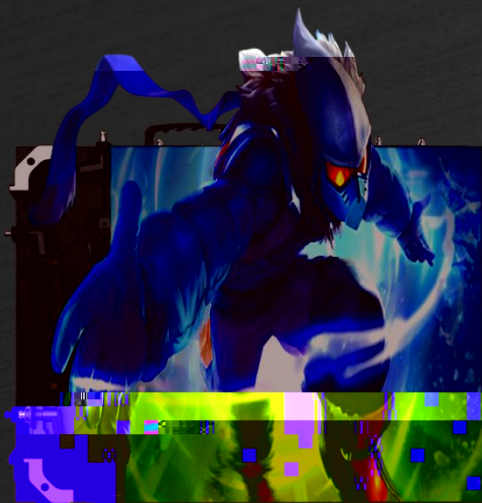


02


PRO

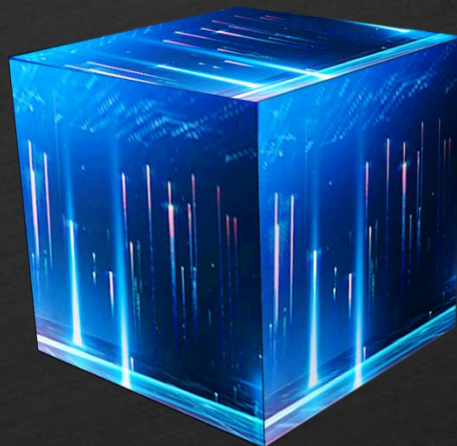

03


MATE

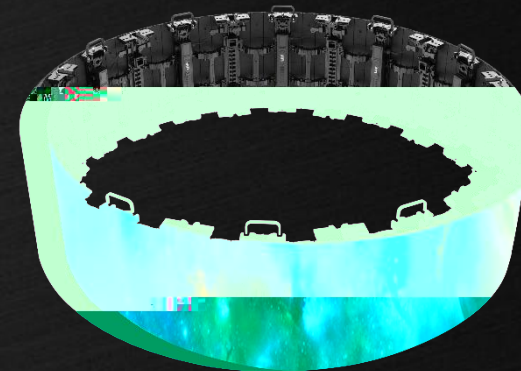

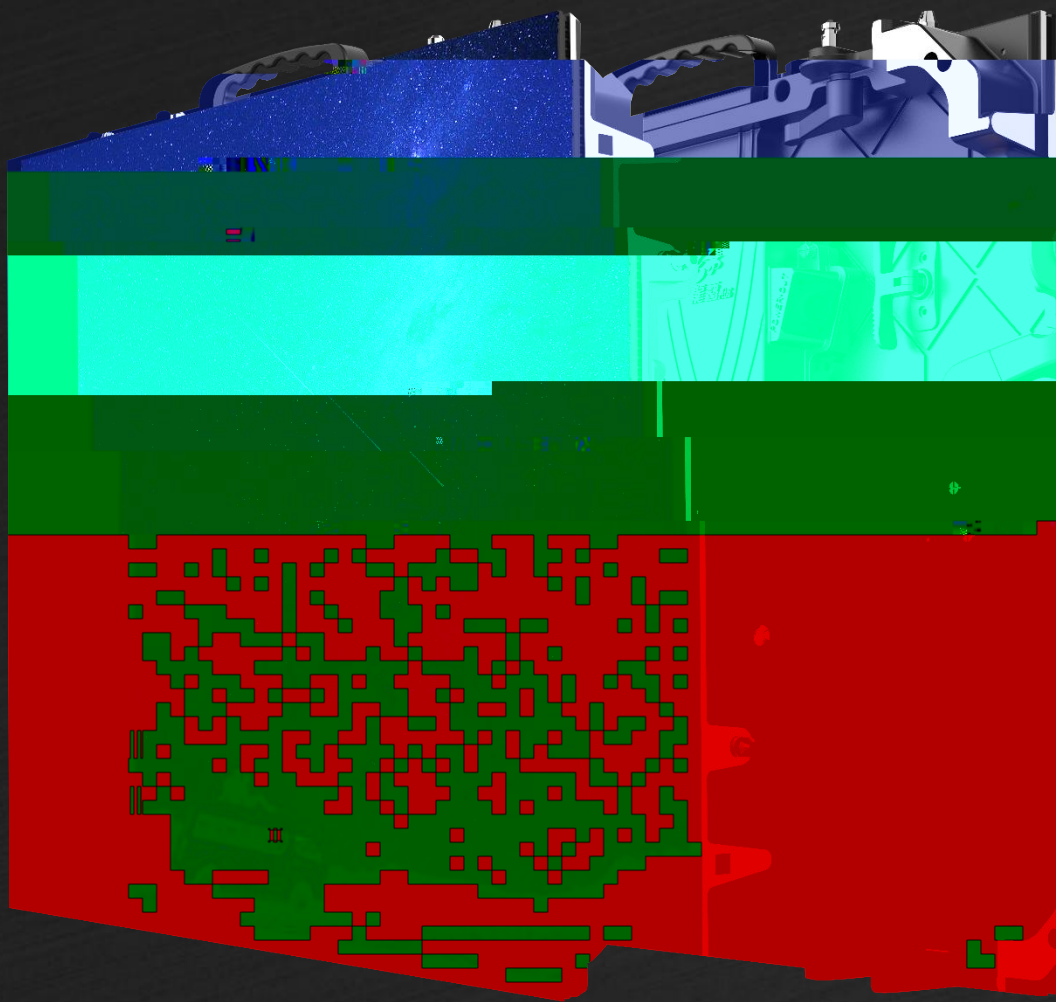

PLUS

体 六 形和V字形 元
， 尚感十 ， 全 代 尚
户内外 屏 单实 定位
与快 扣， 圆 上提手和左
右把手，充分提升 体 搬 和拆
体

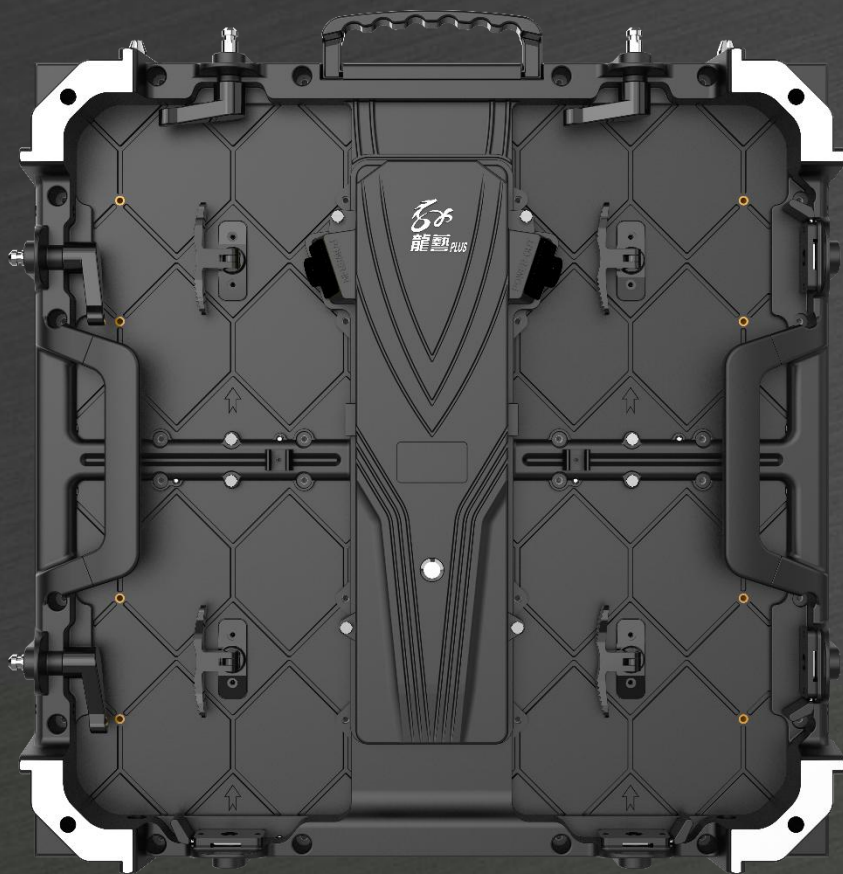


龙艺PLUS 系列

像 度 : 1.5625 1.95 2.5 2.604 2.97
3.91mm
度 : 16384
可 度 : >140°
屏幕亮度 : >800nit, @ 屏
刷 率 : 3840Hz (可 7680Hz)
护 级 : IP65/IP50
应 境 : 户外/室内



PLUS系列——极

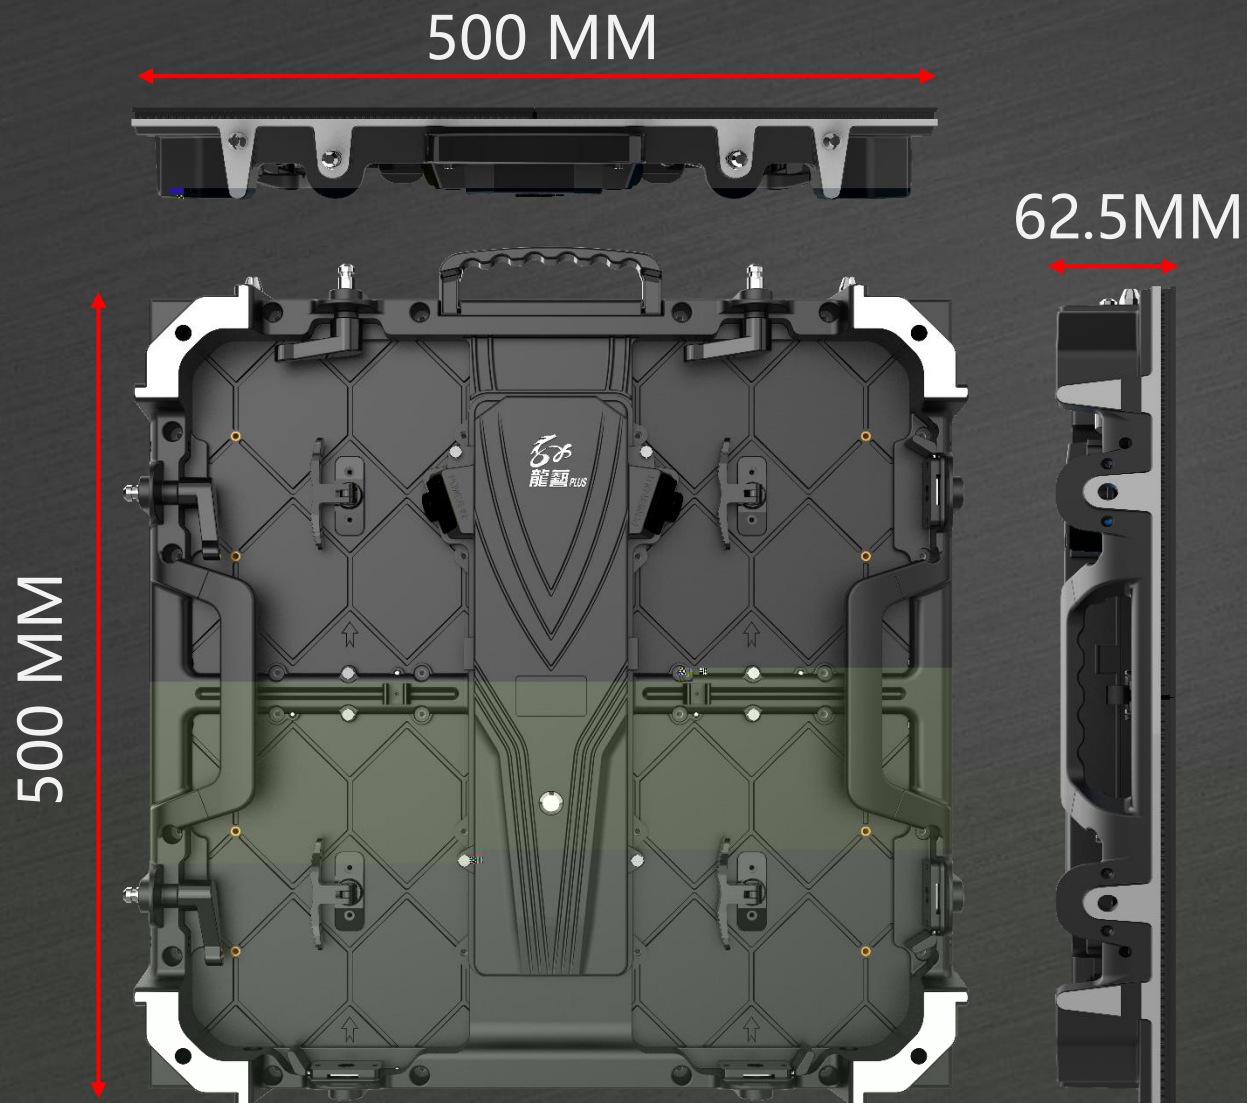


箱体尺寸 : 500*500*62.5mm
箱体 : 6.5kg
箱体材 : 压
模 尺寸 : 250*250mm






PLUS系列——箱体 构

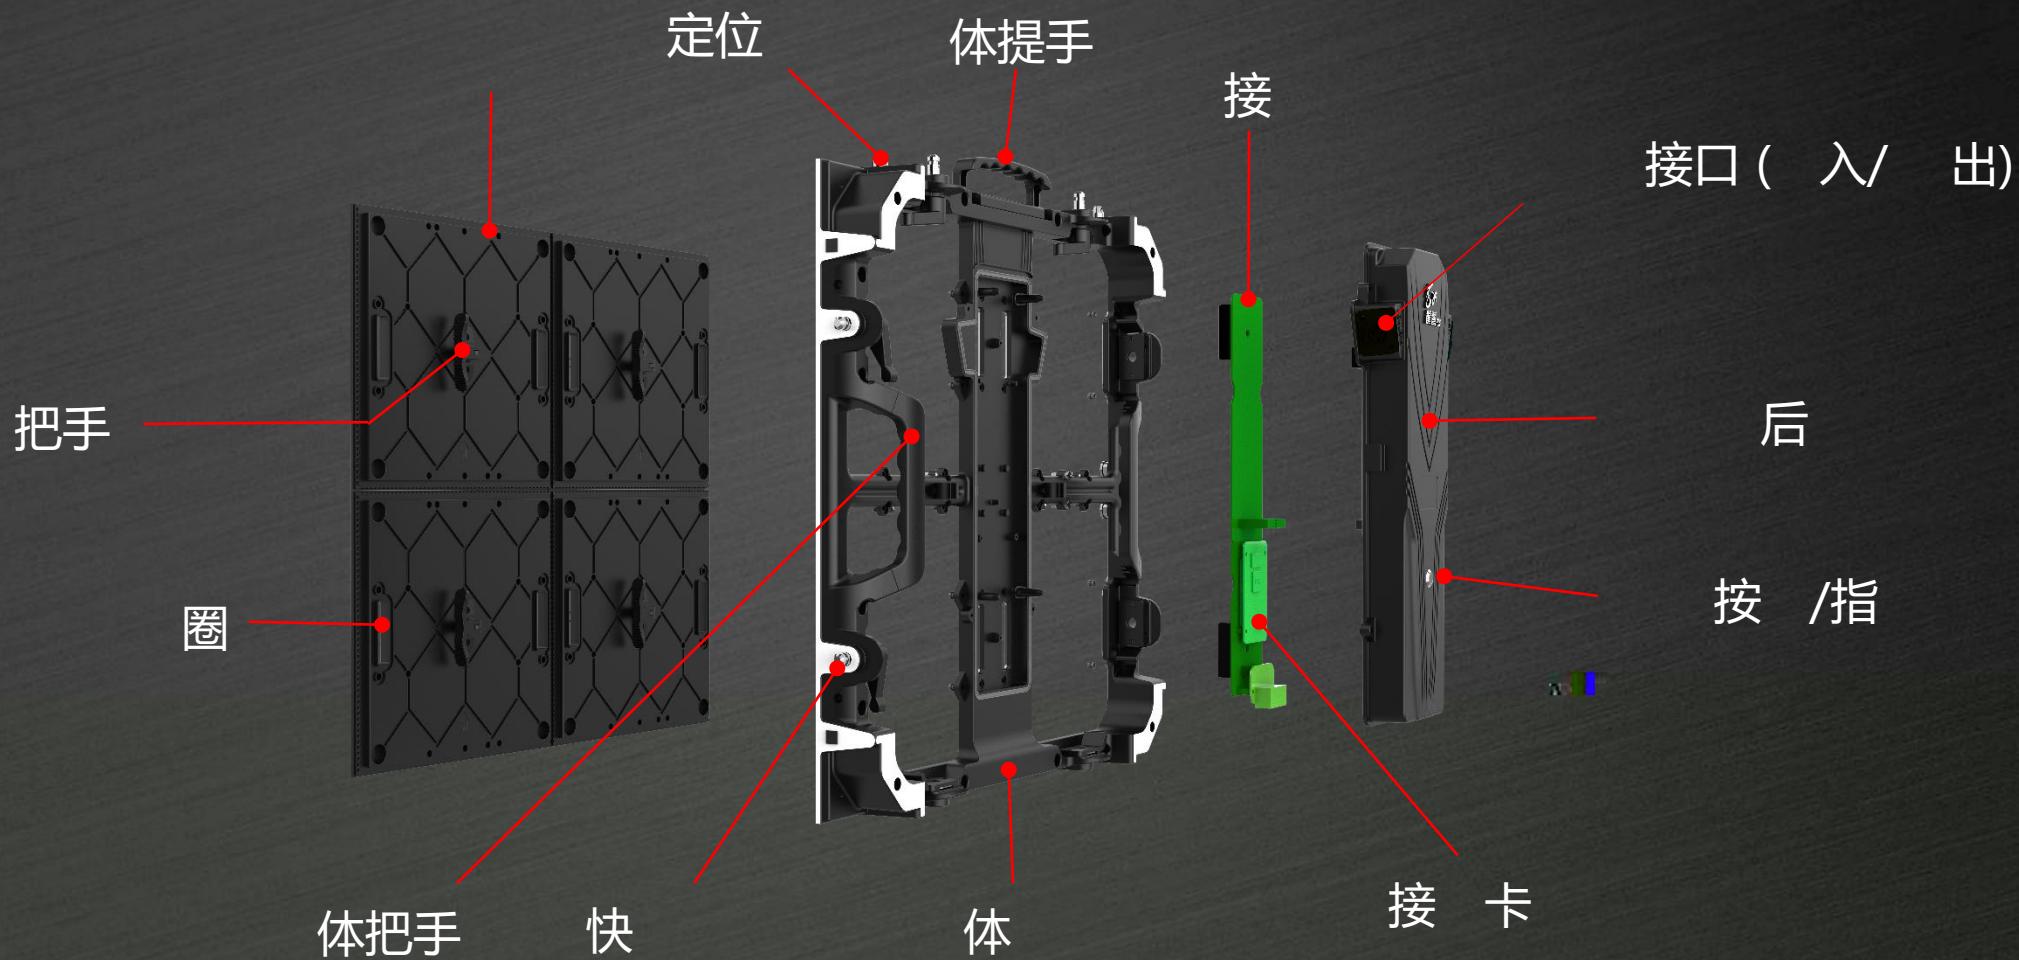



PLUS系列—— 体化

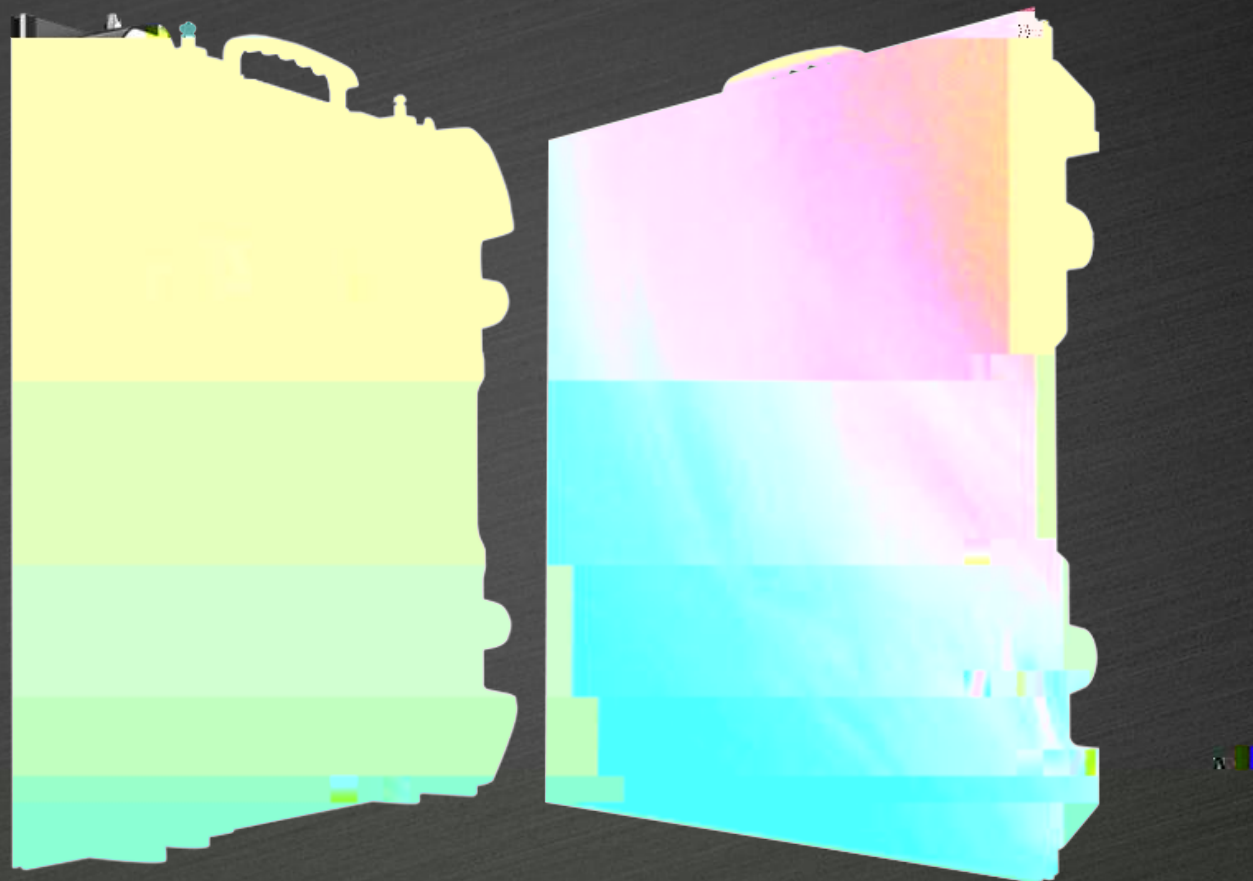

体化，同列 互换，实不同 产品代



PLUS系列——硬 接 与 线



HUB 接 式，决信号，
体与 体 接 式，便快捷，
定性；
持 动 技 与 度提升技，在
原基 上提 4倍 度，拥 加
图像






PLUS系列——便捷 护




体 定位 与快 ， 体上
下 块 完成 定， 利于 体 拼
，减少拼 成 ；
体拥 圆 大提手和左右把手， 便
抓握 搬 体

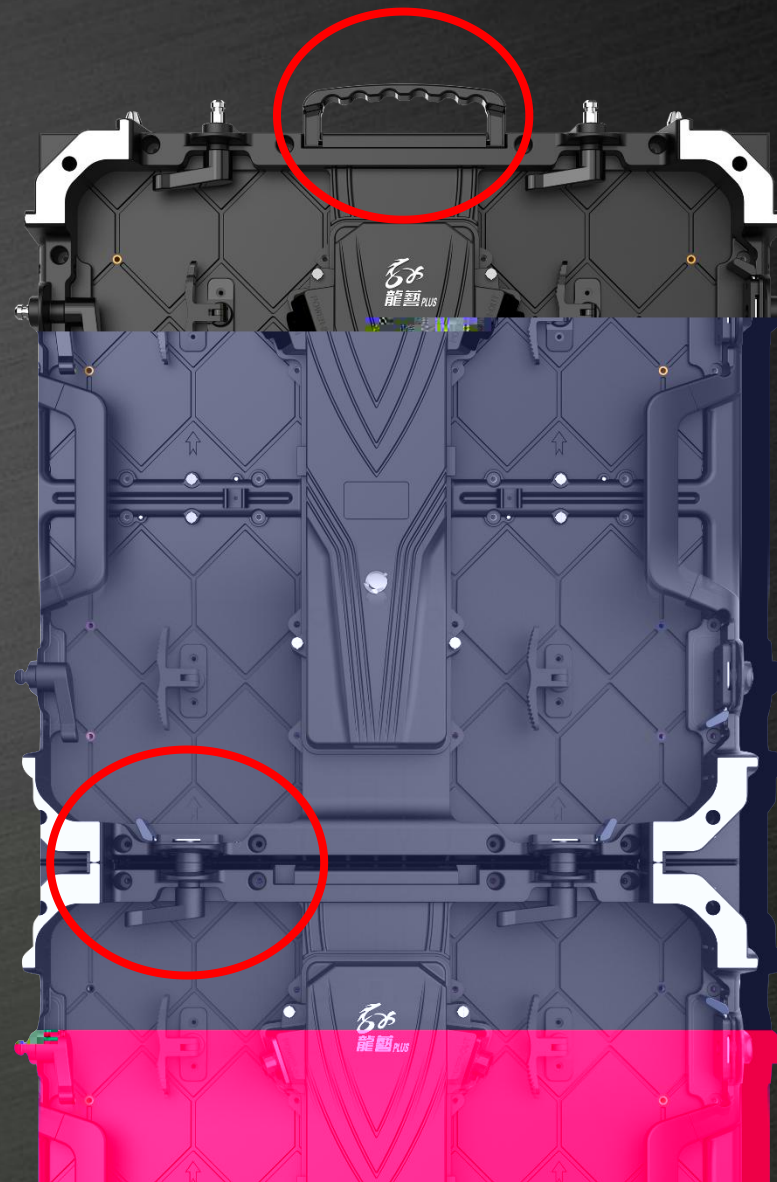



PLUS系列——前后 护

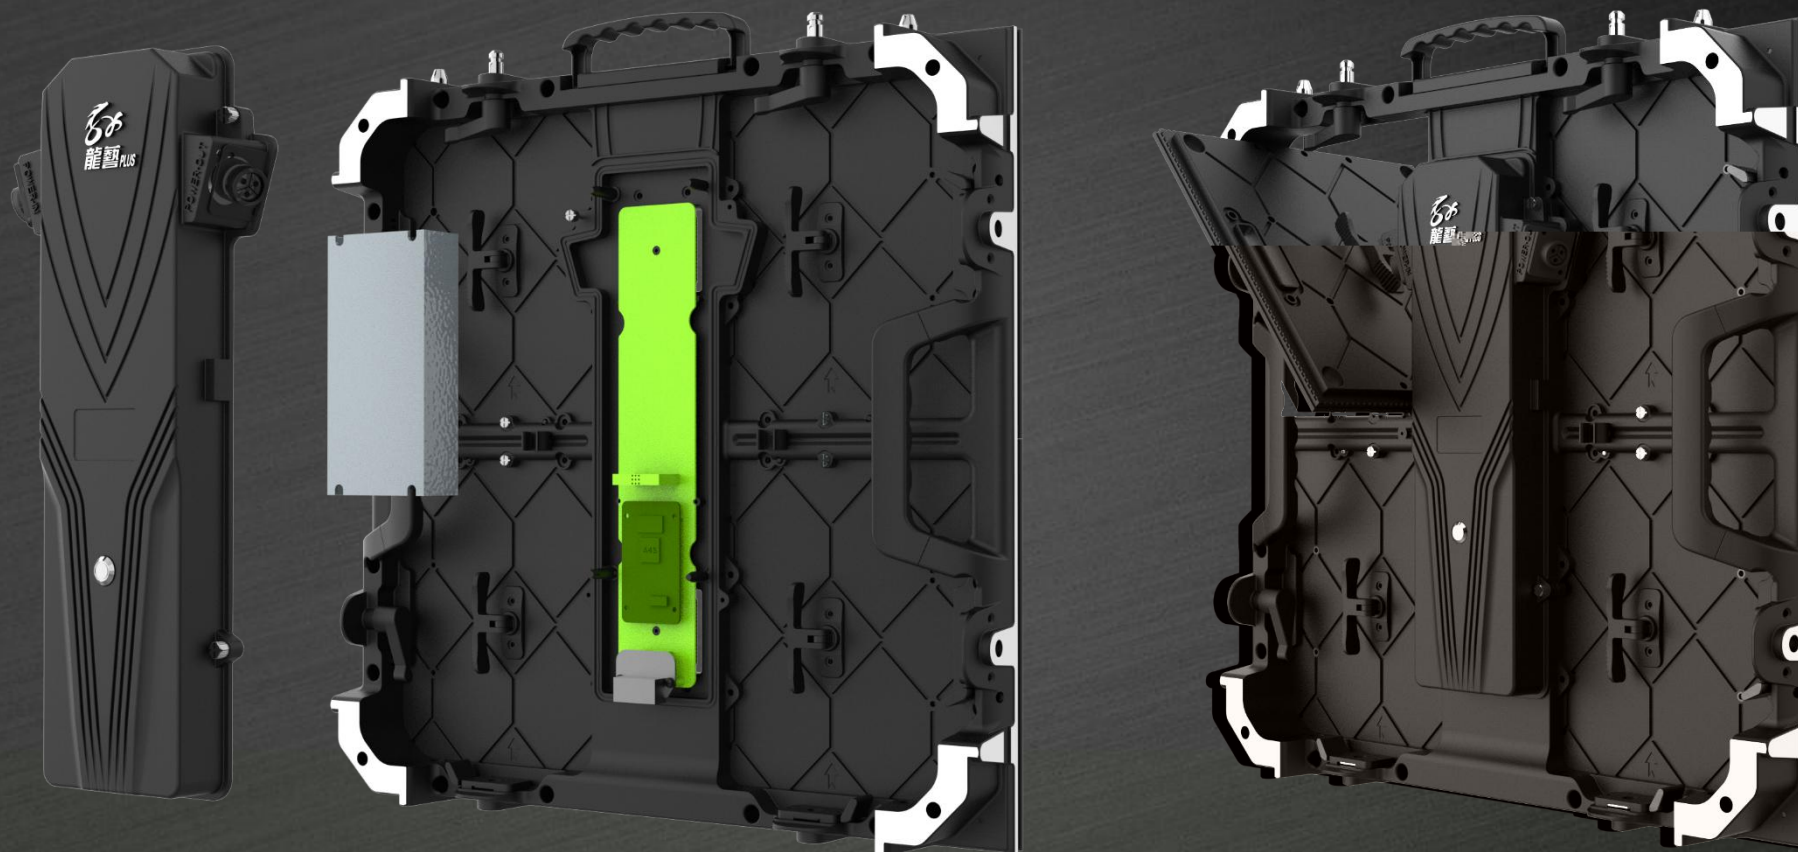


模块化，所有件均可拆卸，支持前后防护，多场景应用



PLUS系列——安全 护



GOB和 护技 ， 护
 实 尘 IP65 ，
 天 下 ， 依 可 以 常 工 作
 ， 即 使 在

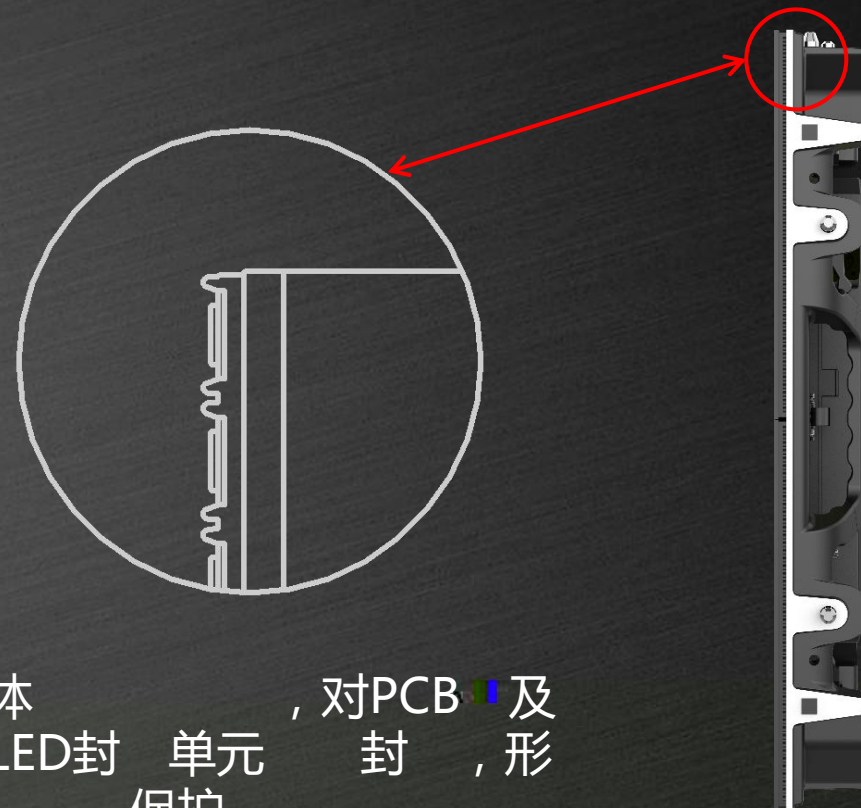

前 体 ， 对 PCB 及
 其 LED 封 单 元 封 ， 形
 成 保 护




PLUS系列——技术参数



型号	PLUS-P1.5625	PLUS-P2.604	PLUS-P3.91	PLUS-P3.91
像素	1.5625mm	2.604mm	3.91mm	3.91mm
LED型号	SMD1212	SMD1515	SMD1921	SMD2121
像素密度	409600pixel/	147456pixel/	65536pixel/	65536pixel/
屏幕亮度	>450nit, @ 屏	>800nit, @ 屏	>4000nit, @ 屏	>800nit, @ 屏
模 像素	160×160	96×96	64×64	64×64
扫描 动	1/40扫描, 恒 动	1/16扫描, 恒 动	1/16扫描, 恒 动	1/16扫描, 恒 动
箱体尺寸 (* *宽)	500mm×500mm×62.5mm	500mm×500mm×62.5mm	500mm×500mm×62.5mm	500mm×500mm×62.5mm
显示分 率	320*320pixel	192*192pixel	128*128pixel	128*128pixel
箱体	6.5KG	6.5KG	6.5KG	6.5KG
箱体材	压	压	压	压
最大功	≤800w/	≤800w/	≤800w/	≤800w/
平均功	≤450w/	≤450w/	≤450w/	≤450w/
可 度	H:140° V:140°	H:140° V:140°	H:140° V:140°	H:140° V:140°
刷新 率	≥3840Hz	≥3840Hz (可 7680Hz)	≥3840Hz (可 7680Hz)	≥3840Hz (可 7680Hz)
度等级	16384	16384	16384	16384
护等级	IP50	IP50	IP65	IP50
护	体 封 工 (撞)	, 体 封 工	, 封	, 体 封 工
使用寿命	>100,000H	>100,000H	>100,000H	>100,000H
护方式	前后 护	前后 护	前后 护	前后 护
工作温度/湿度	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%
应用环境	室内	室内	户外	室内

PRO

全 代户内外

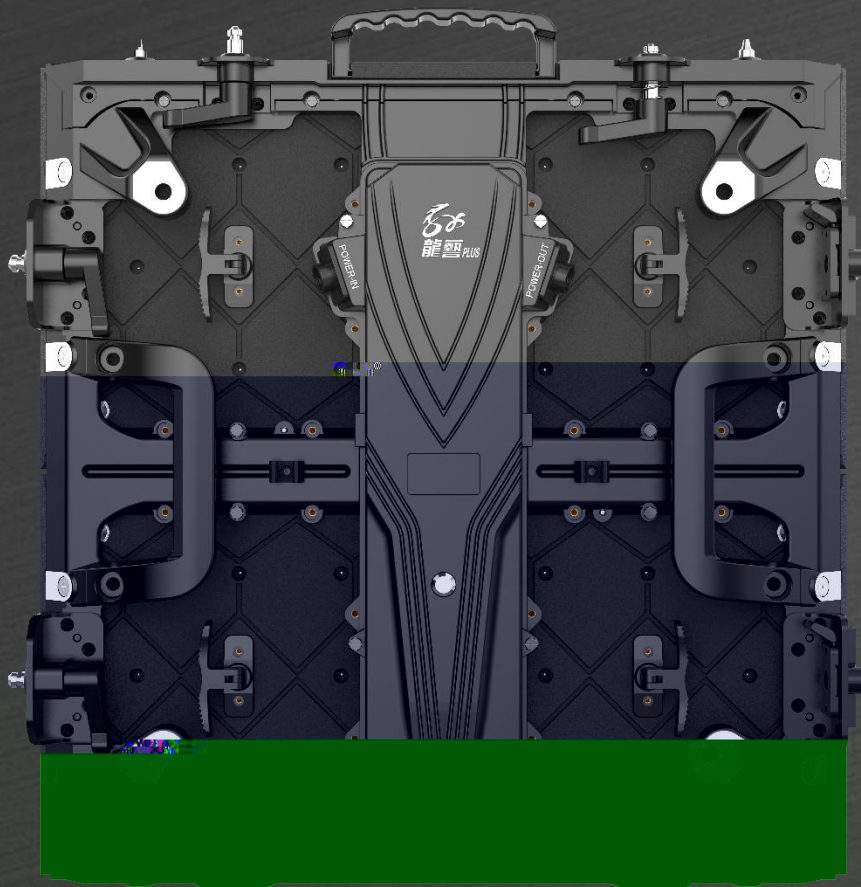


龙艺PRO 系列

像 度 : 2.5 2.604 2.97 3.91mm
可 度 : 16384
可 度 : >140°
屏幕亮度 : >800nit, @ 屏
刷 : 3840Hz (可 7680Hz)
护 : IP65/IP50
应 境 : 户外/室内



PRO系列——可拆卸 扣


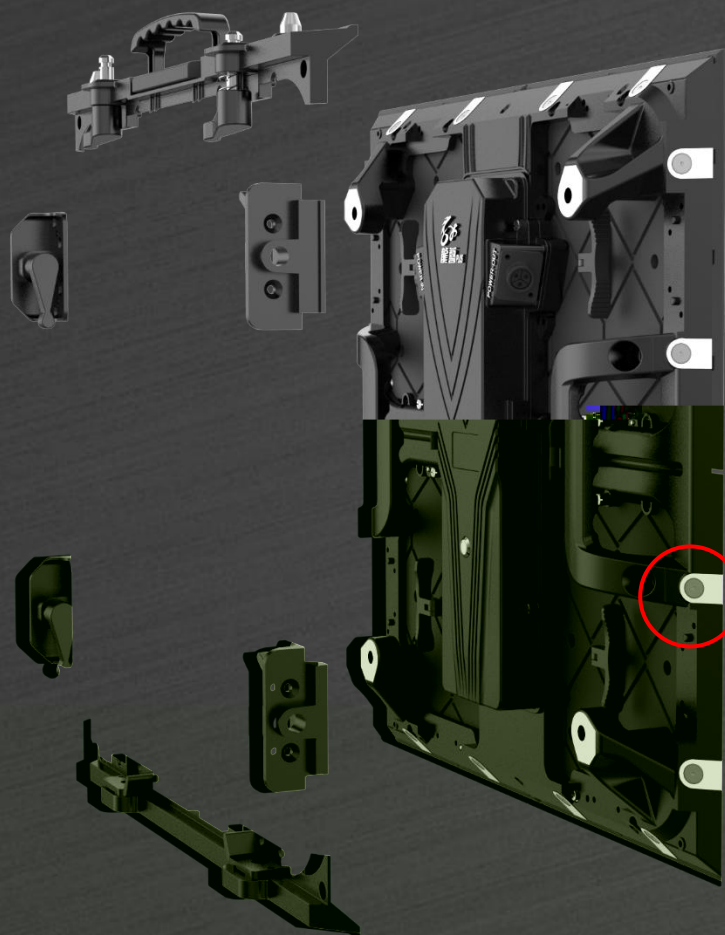


体上下 左右 均可拆卸，创意安 切割 体，
可 据 场实 安 情况 变 体 ，实
(PLUS)与创意 (PRO) 快 换；
体 和侧 均 ， 助安 定位





PRO系列—— 屏多用

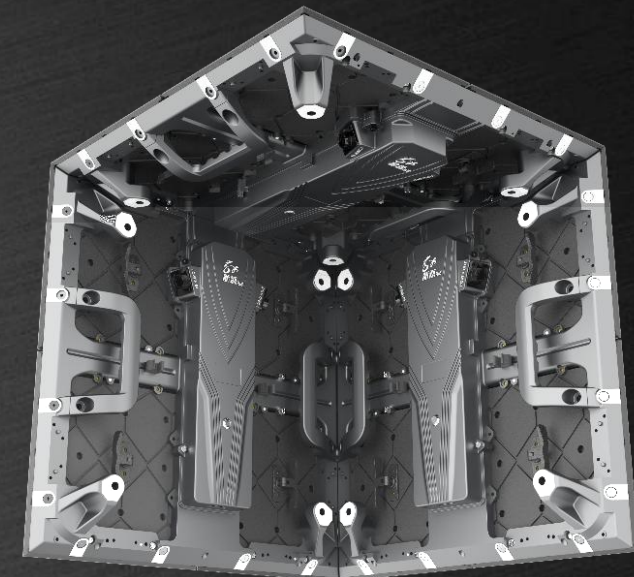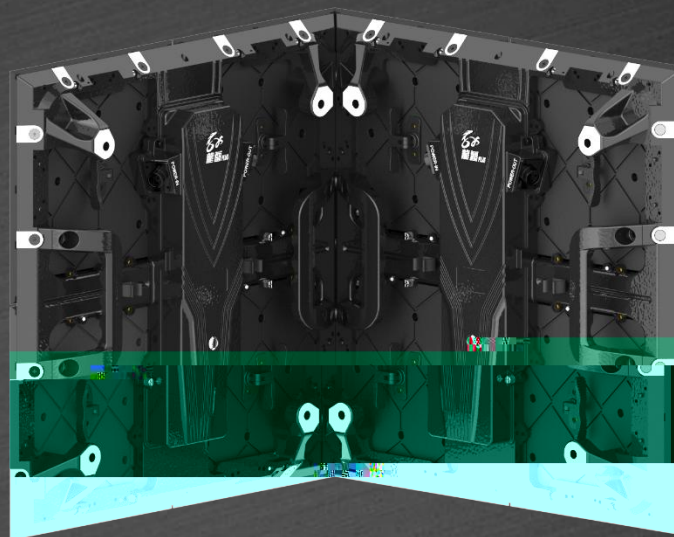

PRO 持 屏安 ；
 PRO 持与 PLUS 拼
 (上图中左 为 PLUS, 右 为 PRO)

PRO 体拆卸左右
 扣后, 持90° 屏拼


PRO 体拆卸全 扣,
 持 屏拼



PRO系列——技术参数




型号	PRO-P2.5	PRO-P2.604	PRO-P2.97	PRO-P3.91
像素	2.5mm	2.604mm	2.97mm	3.91mm
LED型号	SMD1515	SMD1515	SMD2121/1921	SMD2121
像素密度	160000pixel/	147456pixel/	112896pixel/	65536pixel/
屏幕亮度	>800nit, @ 屏	>800nit, @ 屏	>800nit, @ 屏/>2800nit, @ 屏	>800nit, @ 屏
模 像素	100×100	96×96	84×84	64×64
扫描 动	1/25扫描, 恒 动	1/16扫描, 恒 动	1/21扫描, 恒 动	1/16扫描, 恒 动
箱体尺寸 (* *宽)	500mm×500mm×62.5mm	500mm×500mm×62.5mm	500mm×500mm×62.5mm	500mm×500mm×62.5mm
显示分 率	200*200pixel	192*192pixel	168*168pixel	128*128pixel
箱体	6.5KG	6.5KG	6.5KG	6.5KG
箱体材	压	压	压	压
最大功	≤1000w/	≤800w/	≤800w/	≤800w/
平均功	≤450w/	≤450w/	≤450w/	≤450w/
可 度	H:140° V:140°	H:140° V:140°	H:140° V:140°	H:140° V:140°
刷新 率	≥3840Hz	≥3840Hz (可 7680Hz)	≥3840Hz	≥3840Hz (可 7680Hz)
度等级	16384	16384	16384	16384
护等级	IP50	IP50	IP65/IP50	IP50
护	, 体 封 工	, 体 封 工	体 封 工 (撞)	, 体 封 工
使用寿命	>100,000H	>100,000H	>100,000H	>100,000H
护方式	前后 护	前后 护	前后 护	前后 护
工作温度/湿度	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%
应用环境	室内	室内	室内/户外	室内

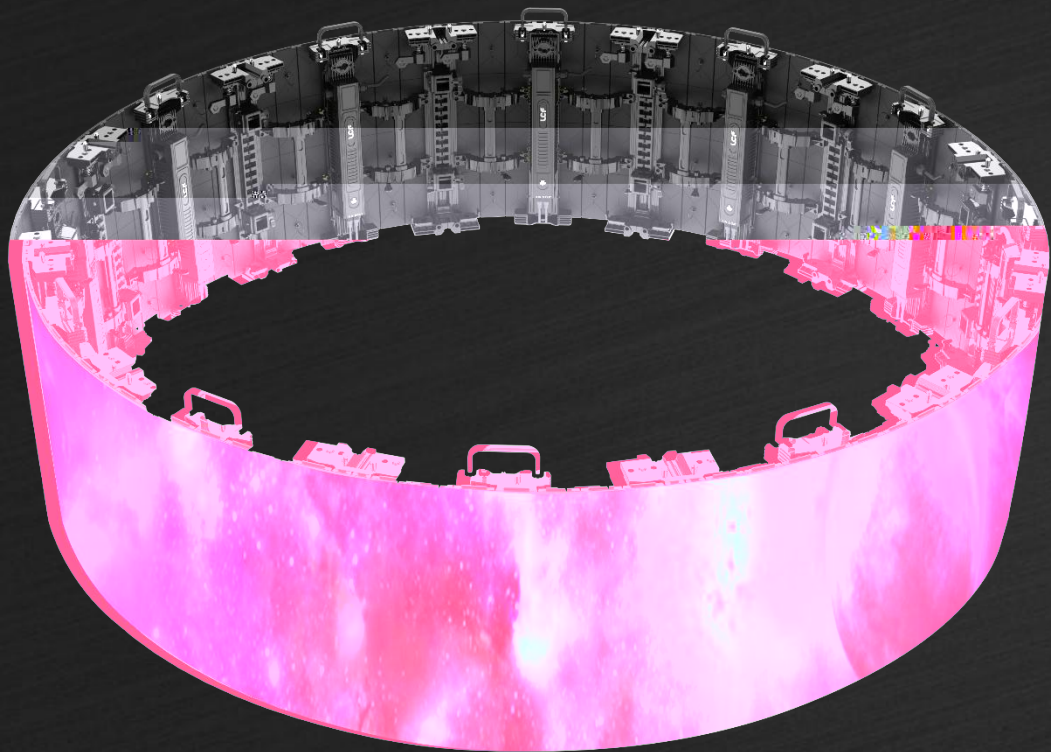

MATE

全 代户内外 性创意 屏
变 性 屏,全 代工业
持多 度弧形拼接,为 台 ,提
供多 型 择

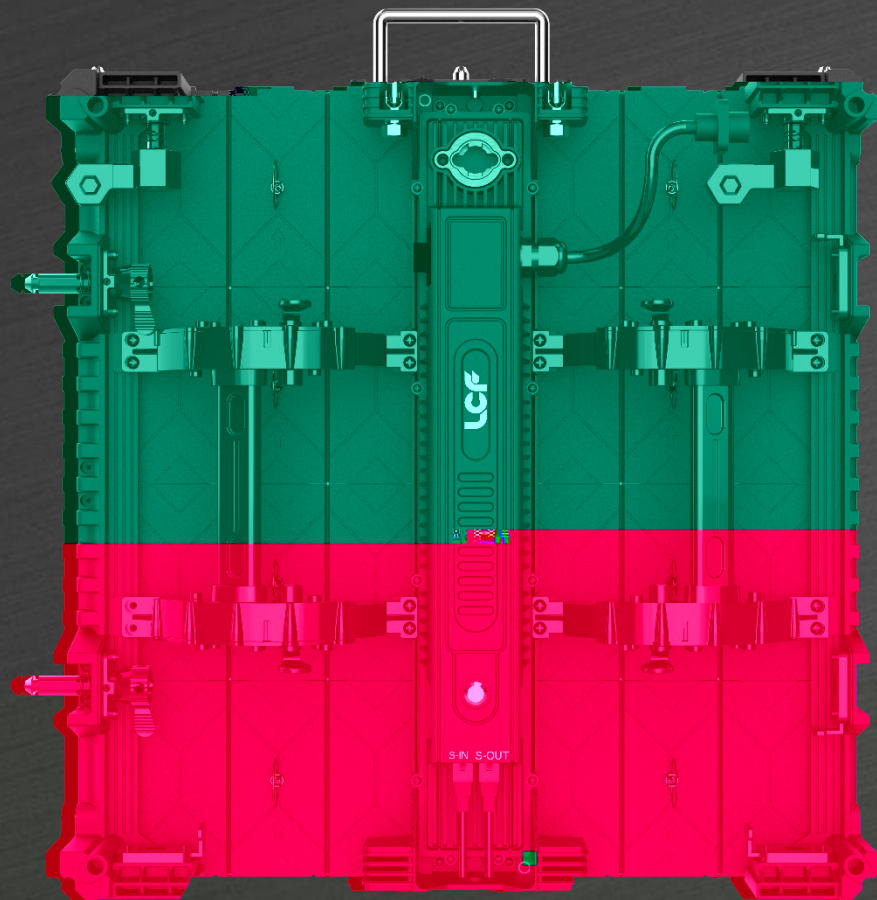


龙艺MATE 系列

体尺寸 : 500*500*94mm
像 度 : 2.5 2.604 2.97 3.91mm
可 度 : 16384
可 度 : >140°
屏幕亮度 : >700nit, @ 屏
刷 率 : 3840Hz (可 7680Hz)
体 重 : 7KG
应 境 : 室内




MATE系列——箱体 构

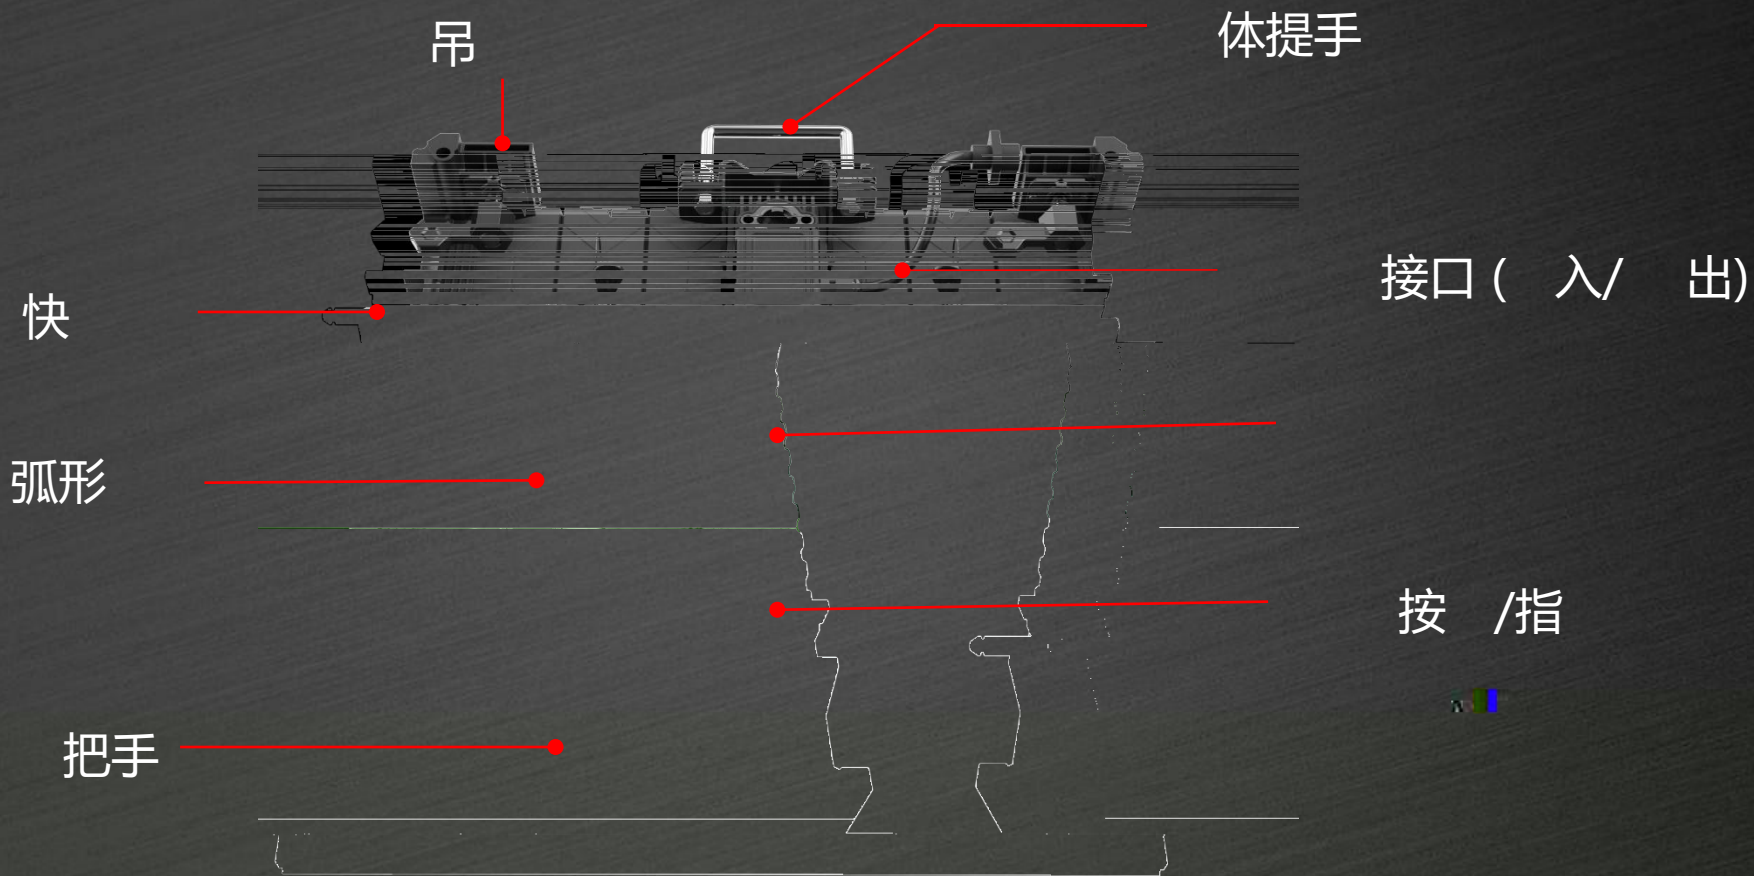




MATE系列——弧形功

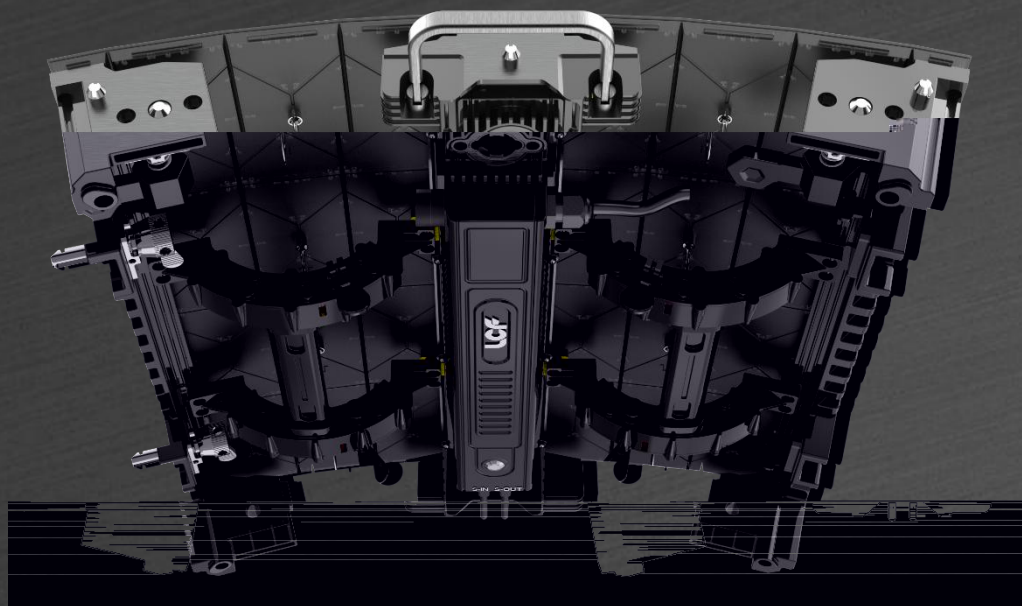


单个体可实S形弯；
单个体可实同凹凸弯；
持内外弧任意与拼接，大
度为 $\pm 30^\circ$

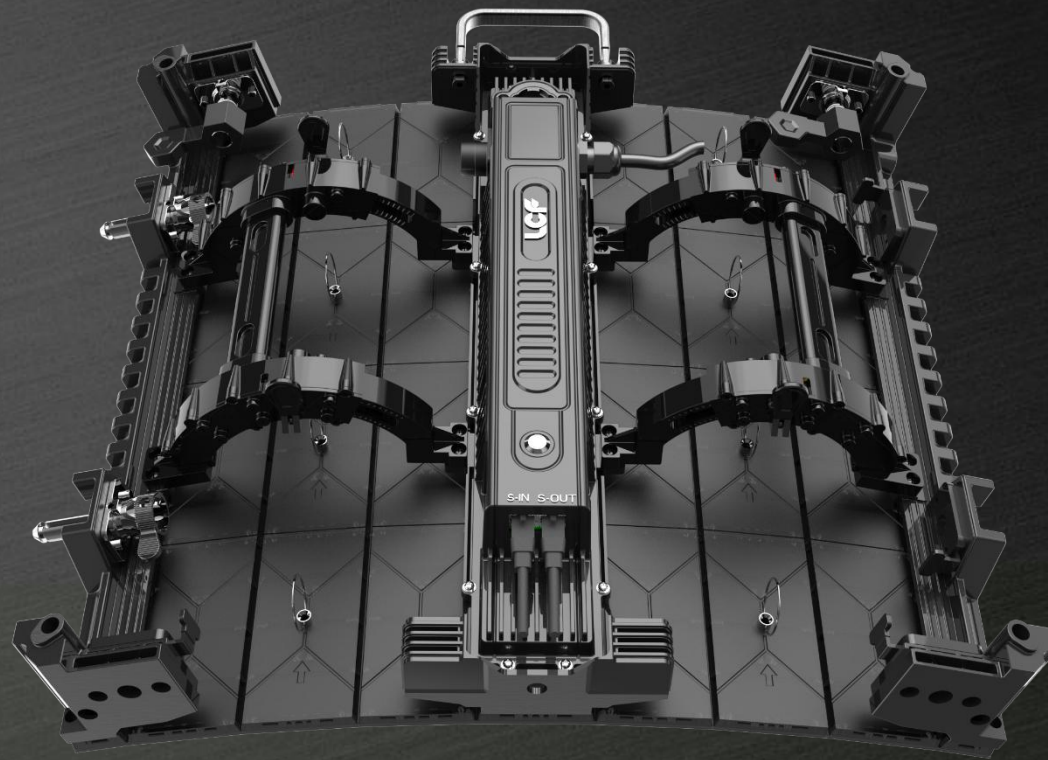




MATE系列——弧形功

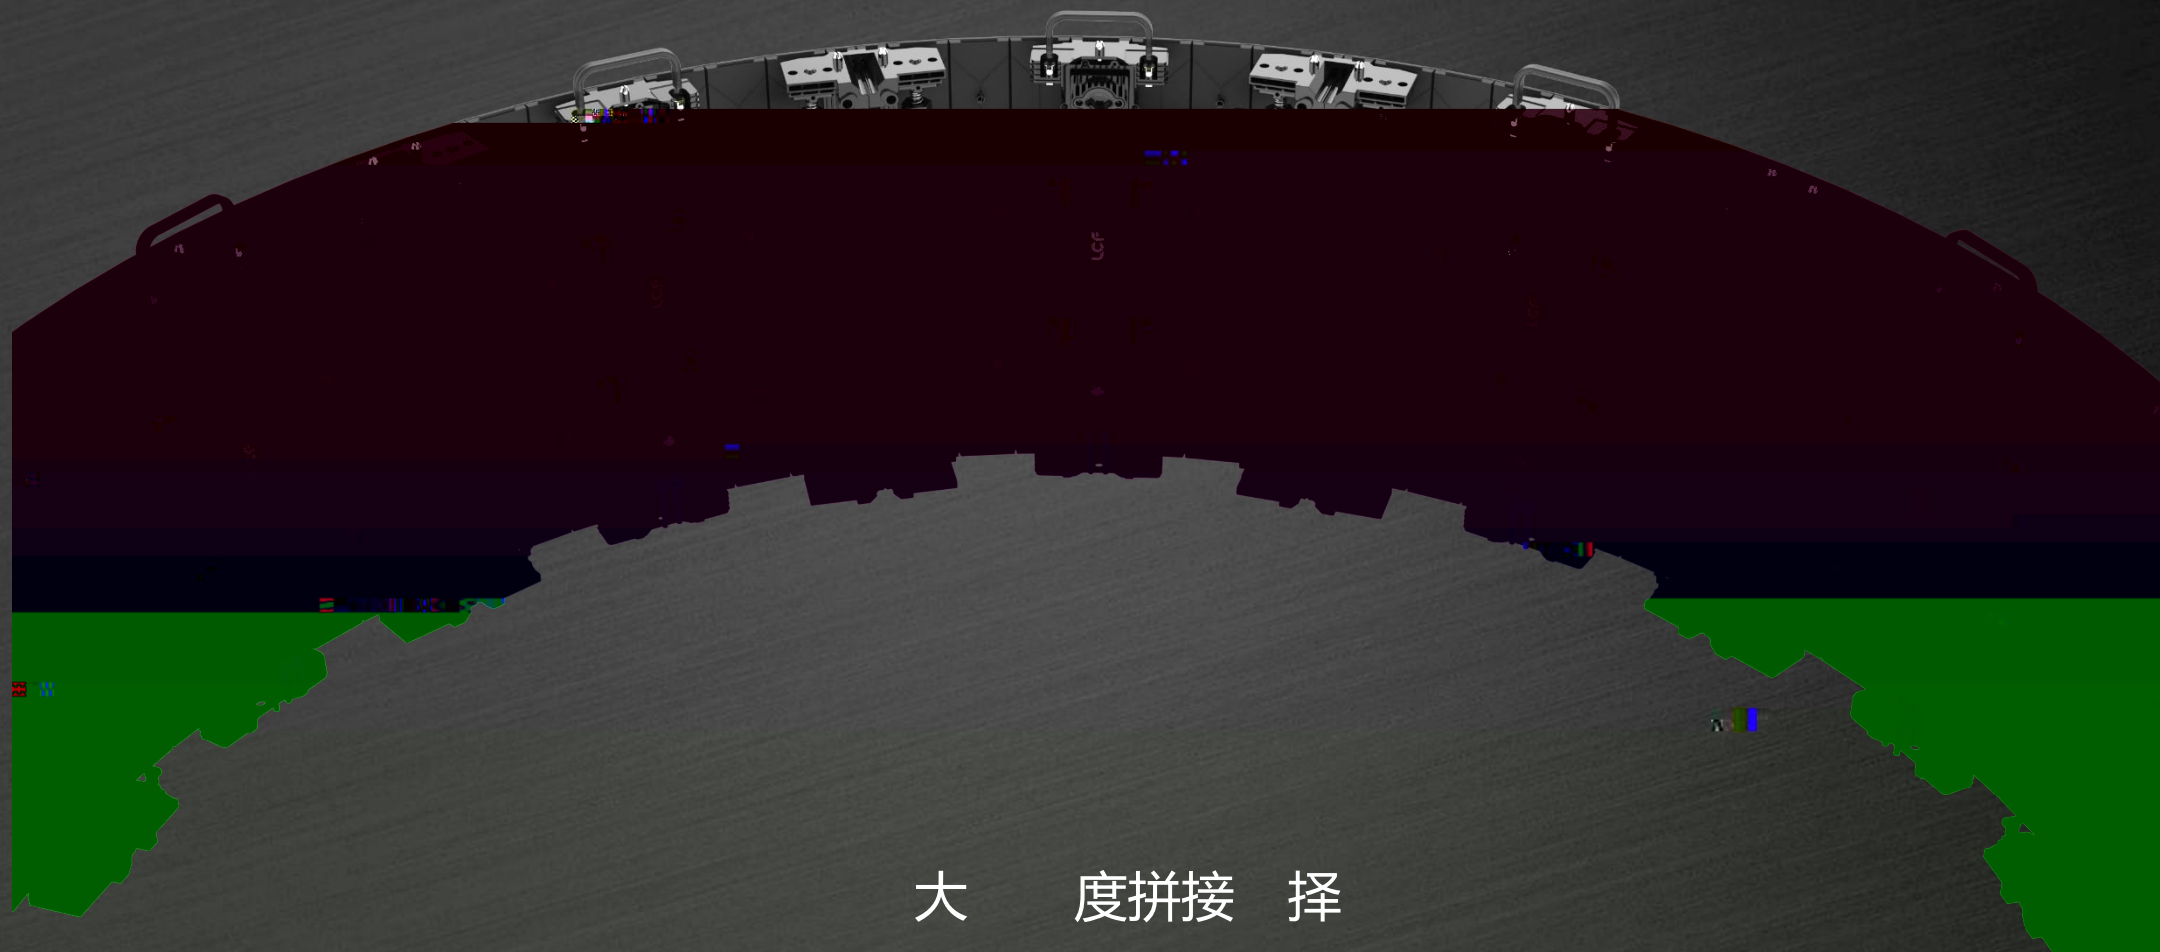


大 度拼接 择

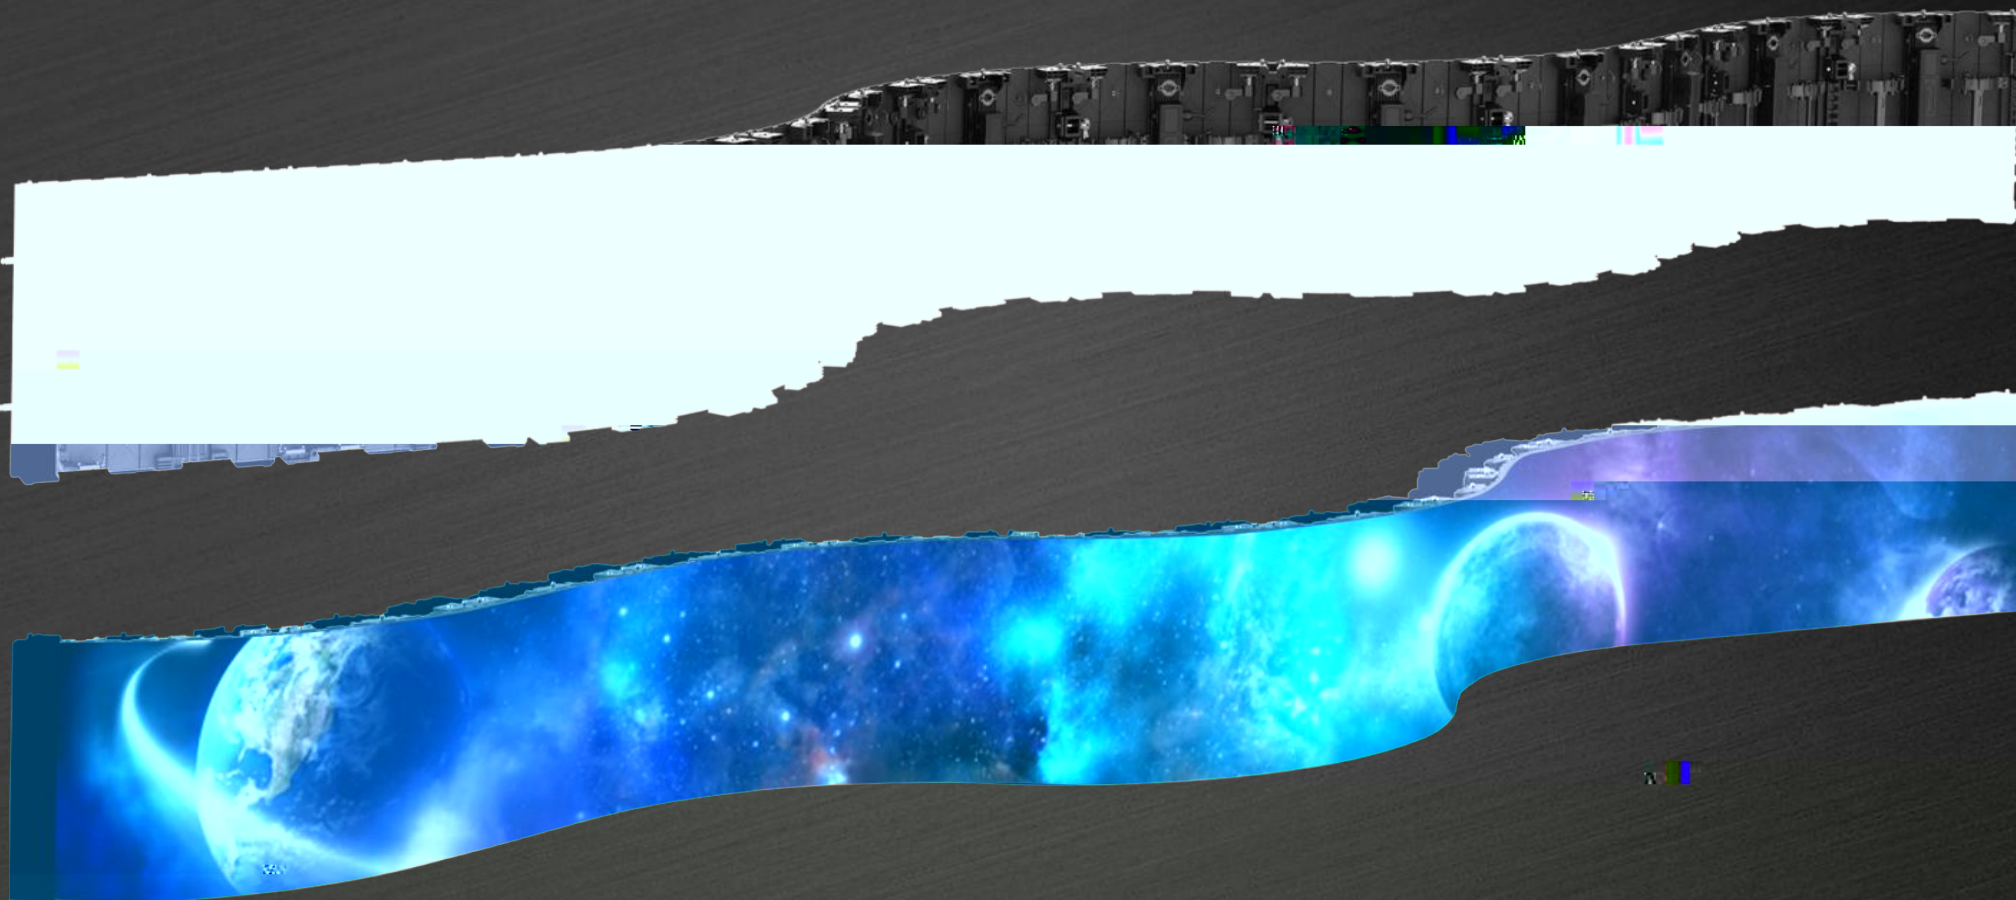

持多 度弧形/ 形拼接
(度 持 $\pm 30^\circ$, $\pm 25^\circ$, $\pm 20^\circ$, $\pm 15^\circ$, $\pm 10^\circ$, $\pm 5^\circ$, 0°)



MATE系列——圆柱拼接

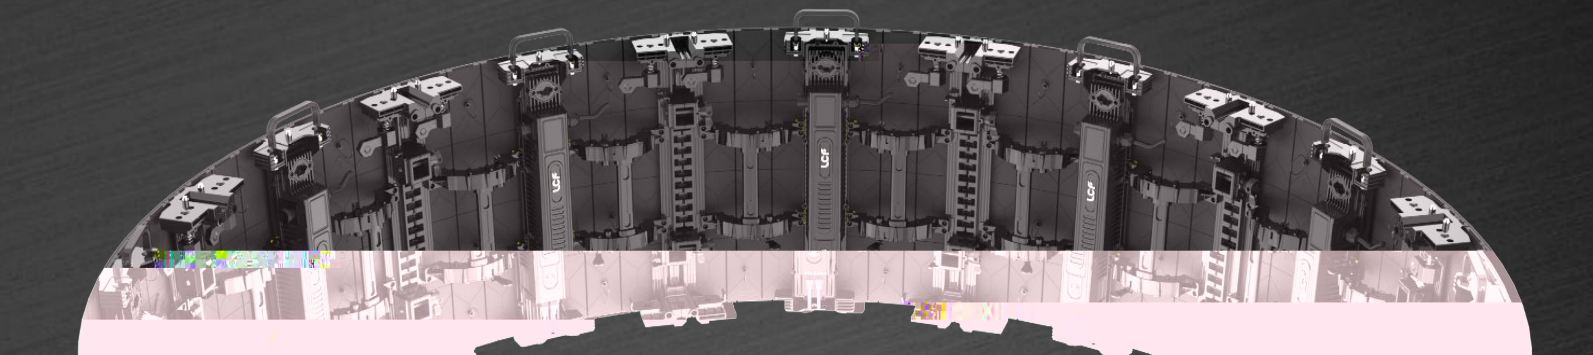

12个 体即可实 圆 拼接






模块化，所有件可拆卸，即插即
插拔技术，同列互
换，支持后护





MATE系列——多种安 方式

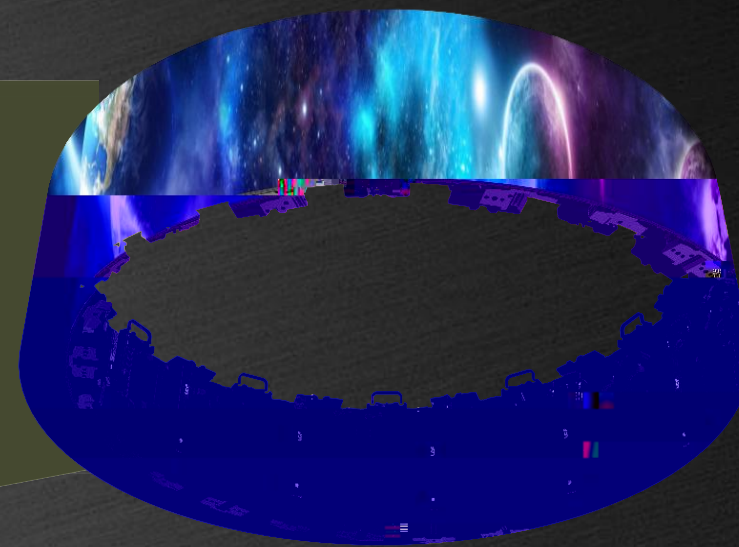

吊

包 / 安



MATE系列——技术参数




型号	MATE-P2.5	MATE-P2.604	MATE-P2.97	MATE-P3.91
像素	2.5mm	2.604mm	2.97mm	3.91mm
LED型号	SMD1515	SMD1515	SMD2121	SMD2121
像素密度	160000pixel/	147456pixel/	112896pixel/	65536pixel/
屏幕亮度	>800nit, @ 屏	>800nit, @ 屏	>800nit, @ 屏	>800nit, @ 屏
模 像素	200×50	192×48	168×42	64×64
扫描 动	1/25扫描, 恒 动	1/16扫描, 恒 动	1/21扫描, 恒 动	1/16扫描, 恒 动
箱体尺寸 (* *宽)	500mm×500mm×94mm	500mm×500mm×94mm	500mm×500mm×94mm	500mm×500mm×94mm
显示分 率	200*200pixel	192*192pixel	168*168pixel	128*128pixel
箱体	7KG	7KG	7KG	7KG
箱体材	压	压	压	压
最大功	≤800w/	≤800w/	≤800w/	≤800w/
平均功	≤400w/	≤400w/	≤400w/	≤450w/
可 度	H:140° V:140°	H:140° V:140°	H:140° V:140°	H:140° V:140°
刷新 率	≥3840Hz	≥3840Hz (可 7680Hz)	≥3840Hz	≥3840Hz (可 7680Hz)
度等级	16384	16384	16384	16384
护等级	IP50	IP50	IP50	IP50
护	, 体 封 工	, 体 封 工	体 封 工 (撞)	, 体 封 工
使用寿命	>100,000H	>100,000H	>100,000H	>100,000H
护方式	后 护	后 护	后 护	后 护
工作温度/湿度	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%	-20°C~+50°C, RH=40~90%
应用环境	室内	室内	室内	室内



(PLUS/PRO/MATE) 系列——包 方式



X 8Pcs

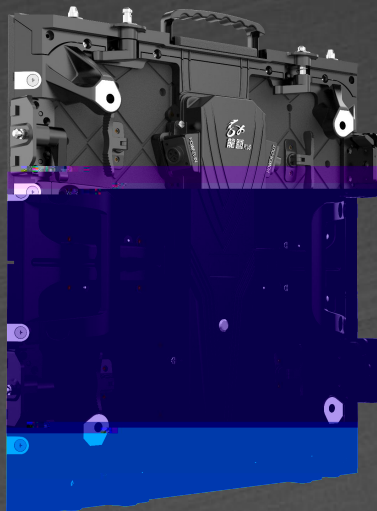

X 8Pcs



X 8Pcs



包 式 :


保 : 保 E1

安全可 : 内 形包 和 撞

: 内 专业 布



(PLUS/PRO/MATE) 系列——应用场景

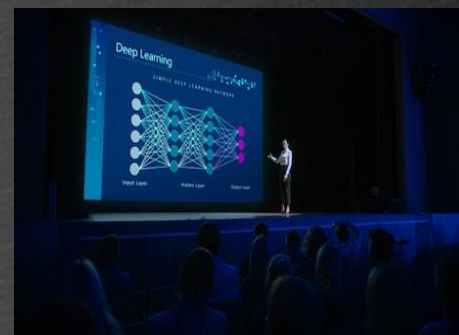


演唱会/ 乐

台/ 店 动

室/影 拍摄

会 /展会

商业场所/创意 域

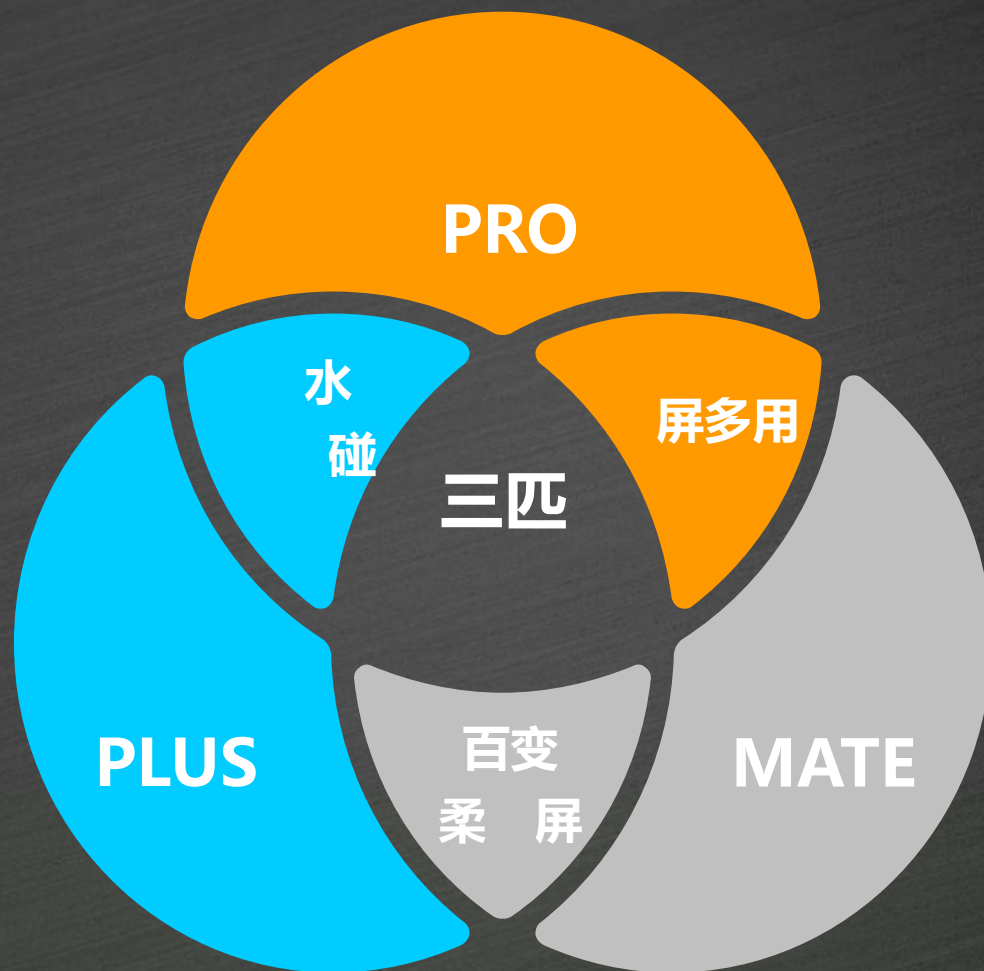

• 天生属于 台

垂听!

